


XPP-5420G

Intrinsically Safe Permissible Flashlight

MARKET APPLICATIONS	Hazardous work environments, industrial, automotive, law enforcement, fire & rescue
DESCRIPTION	This flashlight is cETLus, ATEX, IECEx, MSHA and INMETRO listed Intrinsically Safe Permissible. It uses an LED rated at 140 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable flashlight beam rated at 180 meters. The single body switch provides momentary or constant-on functionality. Power comes from 3 AA premium batteries (not included).
CASE MATERIAL	Engineered Polymer - Green
DIMENSIONS	Length: 7.0 inches (178 mm) • Head Diameter: 1.8 inches (46 mm) • Handle Diameter: 1.0 x 1.5 inches (25 x 38 mm)
WEIGHT	Weight: 7.3 oz. (207 g) with batteries installed
LENS	Unbreakable polycarbonate with scratch resistant coating
LIGHT SOURCE	Flashlight: LED
LIGHT OUTPUT	140 lumens
ON/OFF	Single Body Switch - Momentary or Constant-on Flashlight
RUN-TIME	14 hours
BATTERY	3 Alkaline AA batteries (not included)
FEATURES	<ul style="list-style-type: none"> • cETLus, ATEX, IECEx, MSHA and INMETRO listed Intrinsically Safe Permissible • CREE® LED technology – 50,000 + hours LED life • Momentary or constant-on flashlight • Sharp focused beam for distance illumination • Engineered polymer housing • Non-slip grip • Single body switch • Waterproof • Impact & chemical resistant • Built-in pocket/belt clip • Includes removable lanyard • Requires 3 AA batteries
WARRANTY	Limited Lifetime Warranty

APPROVALS

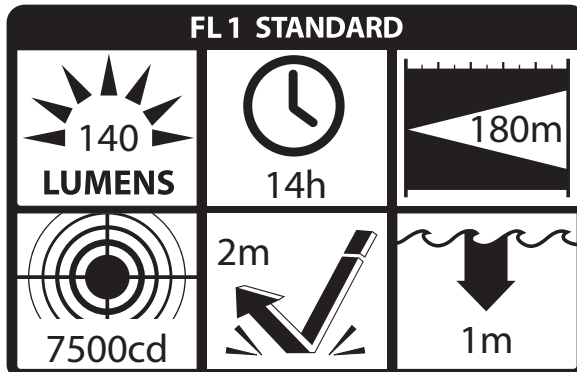

Permissible Nightstick 5420 Flashlight

MSHA APPROVAL No. 20-A130001-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: 1) MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only.
 2) Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types.
 3) Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only.
 4) The Model Nightstick 5420 must not be opened in areas where permissibility is required.

 Intertek	ID 4003544 INTRINSICALLY SAFE SECURITE INTRINSEQUE	 0359 
CLASS I DIV 1 GRPS A-D T3 CLASS II & III DIV 1 GRPS E-G T135C CLASS I ZONE 0 AEx ia IIC T3 Ga CLASS I ZONE 0 Ex ia IIC T3 Ga Ⓢ I M 1 Ex ia op is I Ma Ⓢ II 1 G Ex ia op is IIC T3 Ga	Ex ia op is I Ma Ex ia op is IIC T3 Ga Intertek ITS 13 ATEX27837X IECEx ITS 16.0067X -20°C ≤ Tamb ≤ +40°C 1.5V/Cell AA Alkaline	Conforms to: ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26
Certified to: CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25		

Designed in USA, manufactured in China at a ISO-9001 certified Bayco facility.