


## XPP-5420GX

### X-Series Intrinsically Safe Flashlight

<b>MARKET APPLICATIONS</b>	Hazardous work environments, industrial, automotive, law enforcement, fire & rescue
<b>DESCRIPTION</b>	This Flashlight is cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present. The XPP-5420GX uses a CREE® LED rated at 210 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable flashlight beam rated at 187 meters. The single body switch provides momentary or constant-on functionality. Power comes from 3 AA premium batteries (not included).
<b>CASE MATERIAL</b>	Engineered Polymer - Green
<b>DIMENSIONS</b>	Length: 7.0 inches (178 mm) • Head Diameter: 1.8 inches (46 mm) • Handle Diameter: 1.0 x 1.5 inches (25 x 38 mm)
<b>WEIGHT</b>	Weight: 7.3 oz. (207 g) with batteries installed
<b>LENS</b>	Unbreakable polycarbonate with scratch resistant coating
<b>LIGHT SOURCE</b>	Flashlight: CREE® LED Impervious to shock with a 50,000 hour lifetime
<b>LIGHT OUTPUT</b>	210 lumens
<b>ON/OFF</b>	Single Body Switch - Momentary or Constant-on Flashlight
<b>RUN-TIME</b>	14 hours
<b>BATTERY</b>	3 Alkaline AA batteries (not included)

- FEATURES**
- cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe Permissible
  - CREE® LED technology – 50,000 + hours LED life
  - Momentary or constant-on flashlight
  - Sharp focused beam for distance illumination
  - Engineered polymer housing
  - Non-slip grip
  - Single body switch
  - Dustproof / Waterproof
  - Impact & chemical resistant
  - Built-in pocket/belt clip
  - Includes removable lanyard
  - Requires 3 AA batteries

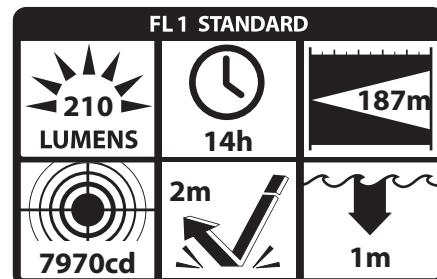


**WARRANTY** Limited Lifetime Warranty

**APPROVALS**



**XPP-5420GX PERFORMANCE CURVE**

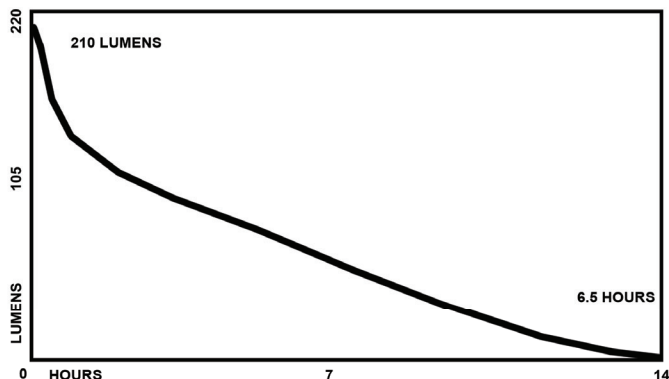

<b>Bayco Products, Inc. XPP-5420GX</b> 640 S. Sanden Blvd. Wylie, TX 75098		
	ID 4003544 INTRINSICALLY SAFE SECURITE INTRINSEQUE	 0359
<b>Intertek</b> CLASS I DIV 1 GRPS A-D T3 CLASS II & III DIV 1 GRPS E-G T135C CLASS I ZONE 0 AEx ia IIC T3 Ga CLASS I ZONE 0 Ex ia IIC T3 Ga Ⓢ I M 1 Ex ia op is I Ma Ⓢ II 1 G Ex ia op is IIC T3 Ga	Ex ia op is I Ma Ex ia op is IIC T3 Ga Intertek ITS 13 ATEX27837X IECEx ITS 16.0067X -20°C ≤ Tamb ≤ +40°C 1.5V/Cell AA Alkaline	
<b>Conforms to:</b> ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11 ANSI/ISA 60079-26	<b>Certified to:</b> CAN/CSA STD C22.2 No 157 CAN/CSA STD C22.2 No 60079-0 CAN/CSA STD C22.2 No 60079-11 CSA STD C22.2 No 25	

Designed in USA, manufactured in China at a ISO-9001 certified Bayco facility.

Bayco Products, Inc. • 640 South Sanden Blvd. • Wylie, TX 75098 • 1-800-233-2155 • 1-469-326-9400 • www.nightstick.com

PDS-XPP5420GX-18